Illinois Department of Transportation
Division of Highways/Region One / District One
201 West Center Court/Schaumburg, Illinois 60196-1096

Bureau of Design
Preliminary Plan Review
Route: FAP 343 IL 68 (Dundee Rd.)
Limits: Kane/Cook County Line to IL 59
Section: 631RS-3
County: Cook
Contract: 60T04

May 17, 2012

Mr. Robert G. Abboud
Village President
Village of Barrington Hills
112 Algonquin Road
Barrington Hills, IL 60010

Dear Mr. Abboud:

Enclosed for your review are two sets of preliminary plans and special provisions for the resurfacing improvement of Illinois Route 68 (Dundee Road) from the Kane/Cook County Line to Illinois Route 59 within the Village of Barrington Hills in Cook County.

The general scope of work for this improvement includes pavement milling, patching and resurfacing with hot-mix asphalt.

This project is currently in the middle years of the Department's FY 2013-2018 Proposed Multi-Modal Transportation Improvement Program and is tentatively scheduled for a 2014 letting. The project's schedule is contingent upon plan readiness and funding availability through our future annual legislative appropriations.

If you have any questions or need additional information, please contact Mr. Jenpai Chang, Design Squad Engineer, at (847) 705-4432.

Very truly yours,

Diane M. O'Keefe, P.E.
Deputy Director of Highways,
Region One Engineer

By:
Ken Eng, P.E.
Plan Preparation Engineer

bcc: Roads & Bridges

Route: FAP 343 (IL 68)
Section: 631RS-3
County: Cook
Contract No. 60T03

FOR
SUPPLEMENTAL SPECIFICATIONS
AND RECURRING SPECIAL PROVISIONS

Adopted January 1, 2012

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS and frequently used RECURRING SPECIAL PROVISIONS.

SUPPLEMENTAL SPECIFICATIONS

Std. Spec. Sec. Page No.

No Supplemental Specifications this year.

PRELIMINARY
(SUBJECT TO CHANGE)

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
343	631RS-3	COOK	23	1
	ILLINOIS	CONTRACT NO. 60T04		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

PROPOSED HIGHWAY PLANS

FAP ROUTE 343 /ILL 68 (DUNDEE RD.)
KANE /COOK COUNTY LINE TO ILL 59
SECTION 631RS-3
RESURFACING
COOK COUNTY
C-91-277-12

FOR INDEX OF SHEETS, SEE SHEET NO. 2

IMPROVEMENT IS LOCATED IN THE VILLAGE OF BARRINGTON HILLS

TRAFFIC DATA:

ADT = 7900
POSTED SPEED LIMIT = 45-55 MPH

PRELIMINARY
(SUBJECT TO CHANGE)

D-91-277-12

LOCATION OF SECTION INDICATED THUS:- ▬

IMPROVEMENT BEGINS
STA 100+00

IMPROVEMENT ENDS
STA 248+00

OMISSION
STATION 172+20 TO
STATION 176+31

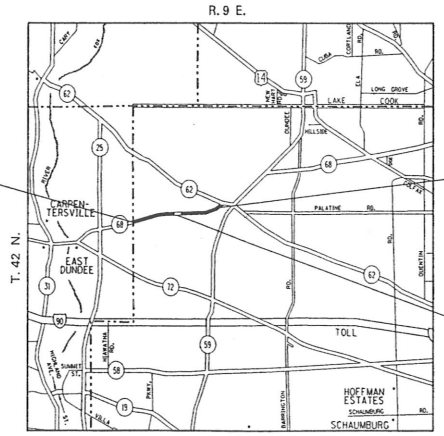

GROSS LENGTH = 14,800 FT. = 2.80 MILE

NET LENGTH = 14,389 FT. = 2.73 MILE



FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER JENPAI CHANG 847-705-4432
PROJECT MANAGER KEN ENG 847-705-4247

CONTRACT NO. 60T04

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED _____ 20 ____

_____
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

_____ 20 ____

_____
ENGINEER OF DESIGN AND ENVIRONMENT

_____ 20 ____

_____
DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS